

NANOMYTE® SOX-10 (fine-grade LLTO)

Physical Characteristics

Product Description: Lithium Lanthanum Titanate

Chemical Formula: Li_{0.34}La_{0.56}TiO₃

Color: White

Phase Purity: > 95%

Average Particle Size (D50): $1-2 \mu m$

Crystal Structure: Cubic

Crystal Density: 5.00 g/cm³ **Specific Surface Area:** 2.02 m²/g

Ionic Conductivity: 10⁻⁵ to 10⁻⁴ S/cm (unsintered, cold-pressed pellet @ RT)

*Sintered material will have higher ionic conductivity


Operating Conditions

Stability Voltage Window: ~ 8.0V vs. Li/Li+

Sensitivity to Air or Moisture: Stable, but limit exposure to air/CO₂

Recommended Working Atmosphere: Air

Characterization Data

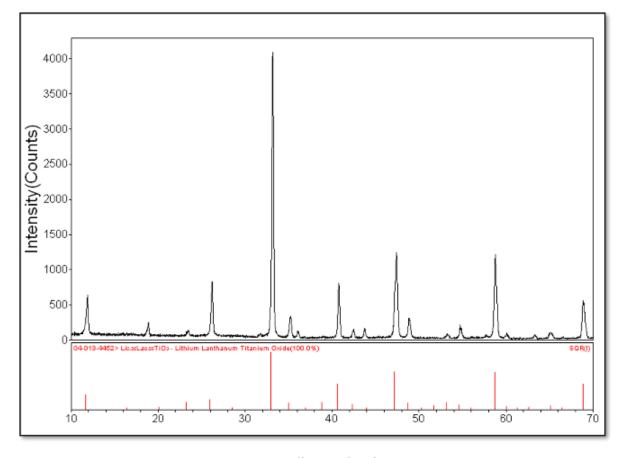


X-ray Diffraction (XRD)



NANOMYTE® SOX-10 (fine-grade LLTO)

Characterization Data (continued)

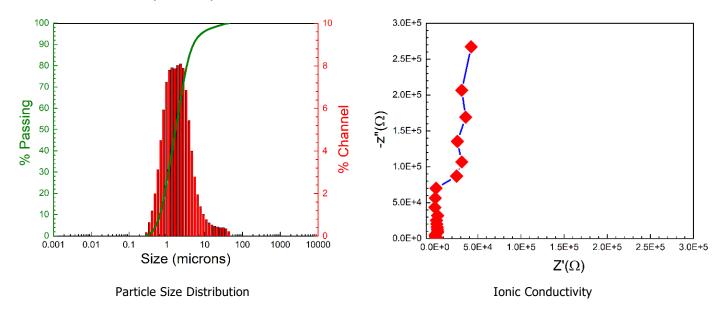

Storage & Handling

Precautions for Safe Handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed.

Conditions for Safe Storage

Keep container tightly closed in a dry and well-ventilated place.

Refer to SDS for complete information on the safe handling of this material.

NOTE: NEI Corporation believes that the information in this spec sheet is an accurate description of the typical use of the product. However, NEI disclaims any liability for incidental or consequential damages, which may result from the use of their products that are beyond its control. Employers should use this information only as a supplement to other information gathered by them and should make independent judgment of suitability of this information to ensure proper use and protect the health and safety of employees. Therefore, it is the user's responsibility to thoroughly test the product in their particular application to determine its performance, efficacy, and safety. Nothing contained herein is to be considered as permission or a recommendation to infringe any patent or any other intellectual right.